


# TECHNICAL SPECIFICATIONS – PIVOT & HINGE DOORS

## 700C - Continuous Hinge - 5/32" Glass

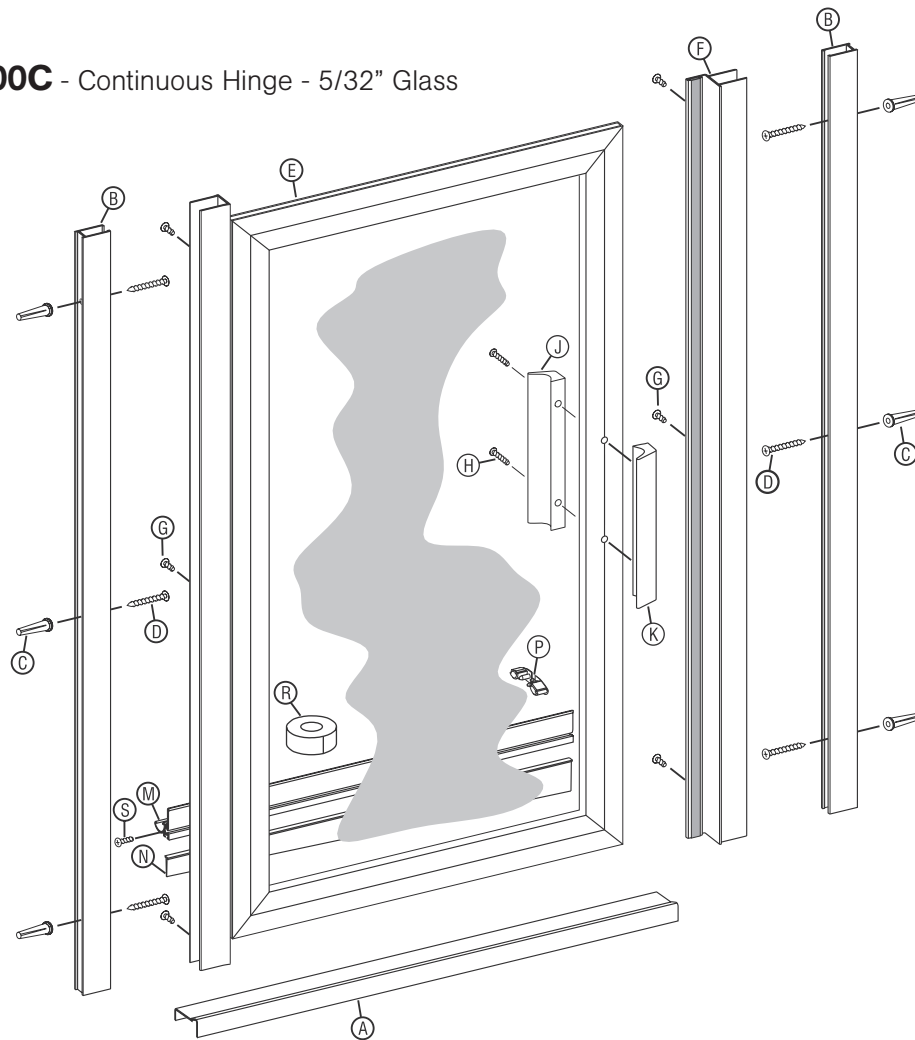

- |  |  |                                       |
|--|--|---------------------------------------|
| <b>A.</b> 1 SC-915 Curb                    | <b>G.</b> 6 #8 x 1/4 Truss Head Screws | <b>P.</b> 2 Drip Plugs                |
| <b>B.</b> 2 SC-508 Wall Jamba              | <b>H.</b> 2 #6 x 1 1/4 Pan Head Screws | <b>R.</b> 1 Roll of Double Stick Tape |
| <b>C.</b> 6 Plastic Wall Anchors           | <b>J.</b> 1 Interior Door Handle       | <b>S.</b> 1 #6 x 3/8 Truss Head Screw |
| <b>D.</b> 6 #8 x 1 1/2 Truss Head Screws   | <b>K.</b> 1 Exterior Door Handle       |                                       |
| <b>E.</b> 1 Glazed Door Panel              | <b>M.</b> 1 SC-589 Drip Rail           |                                       |
| <b>F.</b> 1 SC-552 Strike Jamb with Magnet | <b>N.</b> 1 Tapered Drip Rail          |                                       |

### Calculations

Maximum allowable width of unit = 37 (@ 72 tall)  
 Maximum allowable height of unit = 84 (@ 30 wide)

### Glass Size

Width = opening - 4 11/16  
 Height = Unit ht. - 3 7/16

### Adjustment for Wall Conditions

+ 3/8" on Both Sides  
 - 0"

### Metal Cuts

SC-508 wall jamb = Unit ht. - 7/16  
 SC-549 strike rail = Unit ht. - 1 9/16  
 SC-552 strike jamb = Unit ht. - 7/16  
 SC-589 drip rail = SC-899 bottom rail - 9/16  
 SC-649 hinge jamb = Unit ht. - 7/16  
 SC-648 hinge rail = Unit ht. - 1 9/16  
 SC-899 top & bottom rails = Unit width - 2 13/16  
 SC-915 curb = Unit width